Preparing MTI Locks™ for MTI Connect® Managed Access™

Tools required before you start:



MTI Connect Network Pairing Card
Links the lock to the hub



MTI Versa Key
Must be currently activated



MTI Tool
To insert battery in lock

1 Put the hub in pairing mode


Follow the steps to turn on pairing mode

2 Open the portal and log in

gen3.mticonnectstore.com


3 Select your store

Find it in the Stores list.

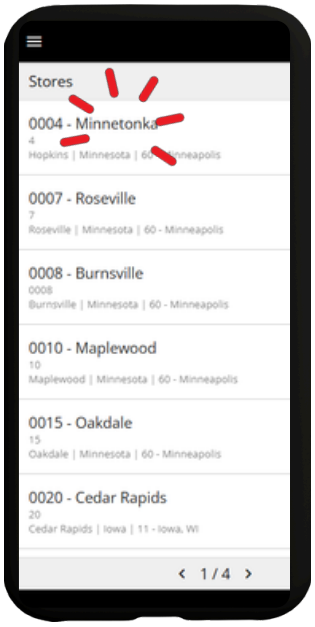


4 Tap the store name

It sits at the top of the screen.

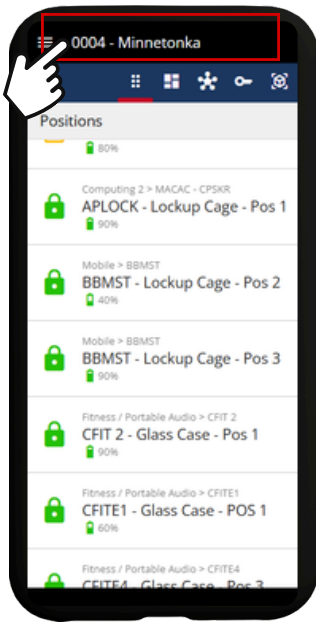

5 Scroll down, tap Start Provision Mode

It is under Connect Hubs.

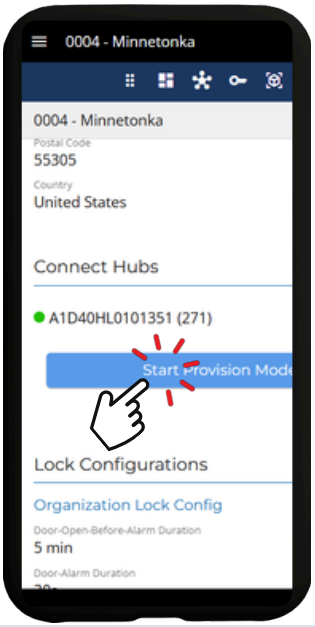

Timer: pairing mode turns off after 15 minutes. Set a timer and restart it if needed.

6 Swipe the Network Pairing Card on the MTI Lock

Listen for the correct beeps

Slow beeping
The lock is looking for the MTI Hub

Double beep: paired
The lock is now paired to the MTI Hub.



7 Test the lock with the MTI Versa Key

Confirm the lock opens. It may take a few tries.