



GUIDE FOR TETHER REPLACEMENT ON FREEDOM MICRO II

Video links: [Model 1](#), [Model 2](#)

- 1) Disconnect position from power and put on grounding strap for safety.



- 2) Insert crescent end of MTI tool into puck and twist to release the puck from the tether.




- 3) Depending on which FMII model you have, either use a T4 screwdriver to loosen the 3 screws at the bottom of the riser,



- OR use the MTI tool to loosen the 2 screws inside the riser.



4) Remove the riser sleeve.

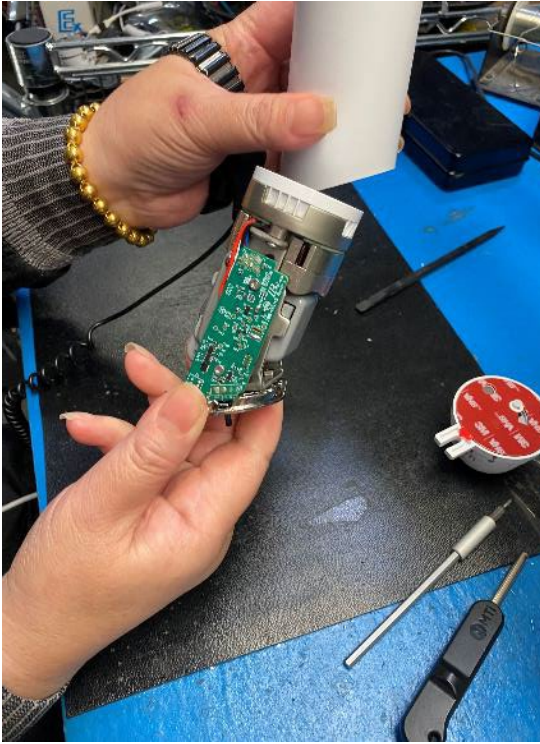

5) On the tether assembly, push both tabs in towards the center and push the unit down through the other side of the riser at the same time.



6) Pull out the tether assembly.



7) Take the new tether assembly. Hold the ferrule out.



8) Insert the ferrule into the hole inside the riser, then push in the tether assembly.



9) The tether assembly will click into place.



10) Put the riser sleeve back on and tighten the screws you loosened in Step 3.



11) Attach the ferrule to the puck. You're done!

